NOBOLT STUD

The NOBOLT stud product is ideal for low load anchoring points ideal for electric junction boxes are components that need to be removable (water pumps, rope bags, protective covers). With its un-obtrusive design they will fit into the tightest of areas. The basis for the design is to allow you fastening points without the need to drill holes and add heavier fixings to your yacht or dinghy.

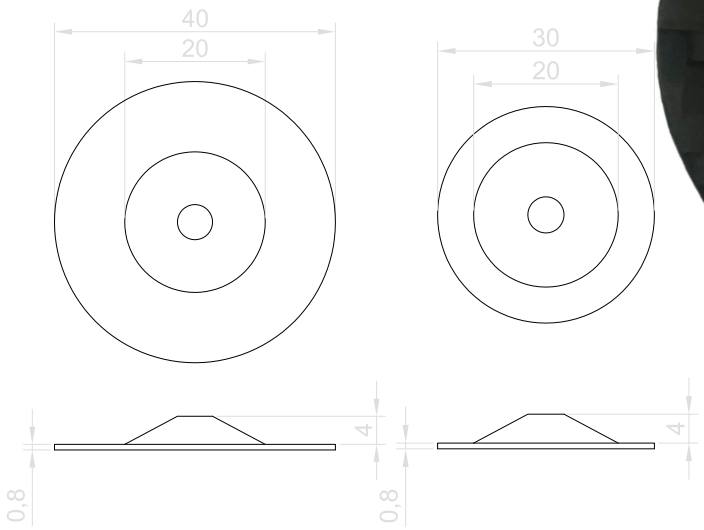

	Button dia mm	Button height mm	Pad height mm	Rope dia mm	Tail Length mm	Weight g	Max Break Load kg	Recommended Working Lad Kg	Stud size mm
NOBOLT Stud L	40mm	4mm	0.8mm	3mm	200mm	2.3g	30Kg	180	5mm
NOBOLT Stud M	30mm	4mm	0.8mm	3mm	150mm	1.7g	25Kg	150	4mm

ATTENTION

- - PRODUCTS MUST ALWAYS BE GLUED TO A CLEAN SURFACE
- - IF YOU WANT AN OPTION TO REMOVE THE PRODUCT AFTERWARDS, USE SIKAFLEX OR OTHER FLEXIBLE GLUE ****USING OTHER GLUES WILL DIRECTLY IMPACT THE RECOMMENDED WORKING LOADS TO BE LESS****
- - FOR A PERMANENT BOND USE A RESIN BASED ADHESIVE
- - DO NOT EXCEED RECOMMEDNDED WORKING LOAD